




TECHNICAL DATASHEET

Transfer Pump BE-M

Transfer pumps for various liquids.

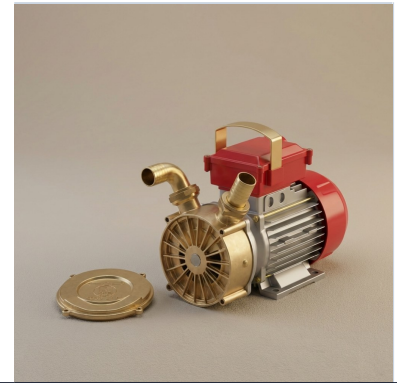

Group designed for pumping fresh and salt water, wine, milk, vinegar, diesel, oil, olive oil, without explosive substances or solid particles or fibers, with a density equivalent to 1100 kg/m³ and kinematic viscosity equal to 1 mm²/s and chemically non-aggressive liquids. Equipped with a button that allows reversing the motor's rotation direction.

APPLICATIONS

- Transfer of wine, milk, vinegar and water.
- Pumping of diesel, oils and olive oil.
- Transfer of fresh and salt water.

TECHNICAL DATA

TECHNICAL SPECIFICATIONS

Type	Bomba de Trásfega
Max Temperature	40 °C
Protection	IP 44
Insulation	Class F
Body	Bronze

DIMENSIONS AND MODELS

Code	Model	kW	HP	V	DN	Max Head	Flow (l/h)
1017000001	BE-M 20	0,4	0,5	230,0	1/2"	1 - 18	1 700 - 300
1017000002	BE-M 25	0,4	0,6	230,0	3/4"	1 - 14	2 400 - 300
1017000003	BE-M 30	0,7	0,9	230,0	1"	1 - 14	4 800 - 300
1017000004	BE-M 40	0,8	1,0	230,0	1" 1/4	1 - 17	5 400 - 300