



TECHNICAL DATASHEET

Winner Swimming Pool Pumps

High-performance self-priming pumps for pool water recirculation and filtration.



The Winner series provides robustness and reliability for your pool maintenance. Featuring a large transparent pre-filter and a chemical-resistant polypropylene body, these pumps are ideal for salt chlorination systems and ensure efficient filtration.

APPLICATIONS

- Recirculação e filtragem de água em piscinas
- Compatível com água salgada (cloração salina)
- Instalações domésticas e coletivas

TECHNICAL DATA


TECHNICAL SPECIFICATIONS

Type	Self-priming Pool Pump
Max Head	21,9 m.c.a.
Max Flow	36,3 m ³ /h
Max Temperature	40 °C
Protection	IP 55
Insulation	Class F
Impeller	Noryl
Discharge	2"
Selo Mecânico	Grafite / Cerâmica

DIMENSIONS

Model	HP	kW	230V (A)	400V (A)	µF	DN
Winner 50	0,5	0,4	4,4	1,4	20,0	2"
Winner 75	0,8	0,6	4,8	1,8	20,0	2"
Winner 100	1,0	0,8	5,5	2,2	25,0	2"
Winner 150	1,5	1,0	7,3	2,9	30,0	2"
Winner 200	2,0	1,5	9,2	3,5	40,0	2"
Winner 300	3,0	2,2	12,2	5,0	40,0	2"

PERFORMANCE CURVE (Q - HM)

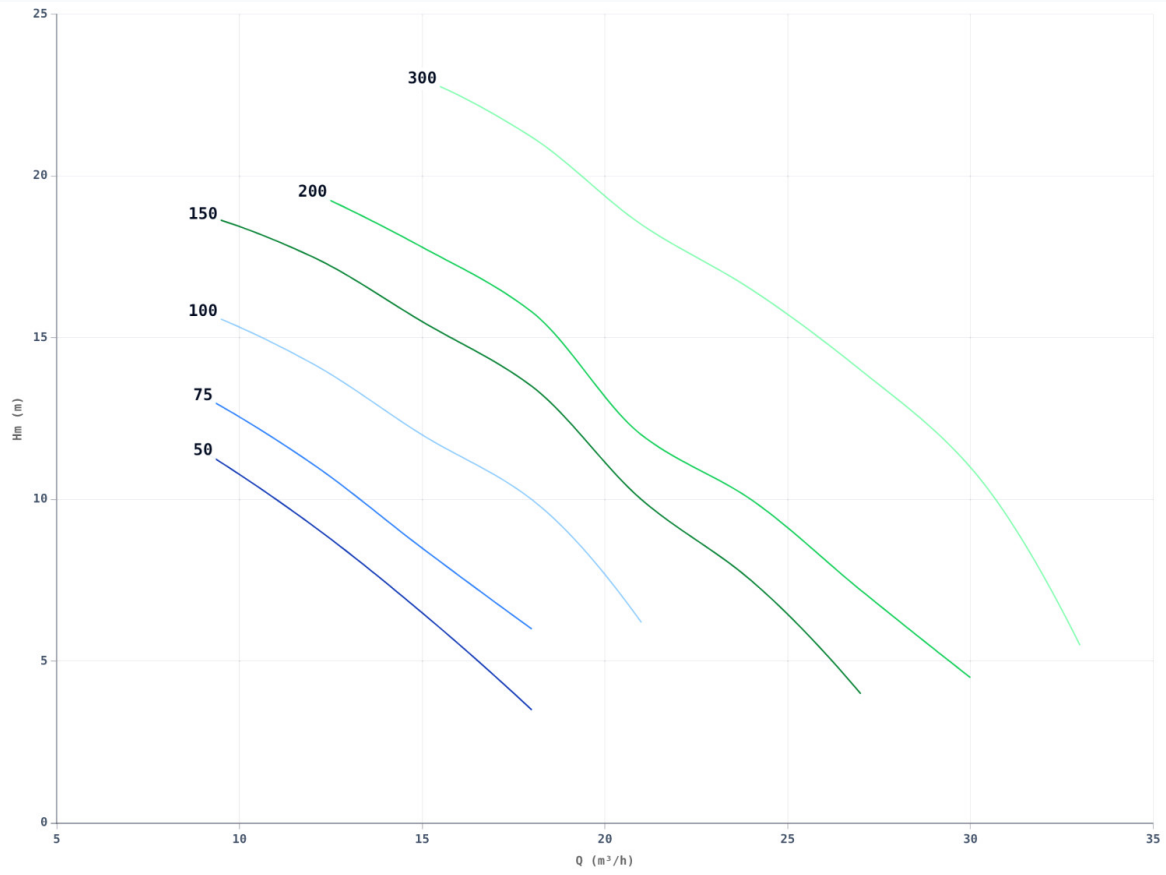

Curvas de caudal (Q) vs. altura manométrica (Hm)

Model	kW	HP	Amperage	m³/h	9	12	15	18	21	24	27	30	33
					Hm (m)								
Winner 50	0,37	0,50	4,40		11,5	9,2	6,5	3,5					
Winner 75	0,55	0,75	4,75		13,2	11,1	8,5	6,0					
Winner 100	0,75	1,00	5,50		15,8	14,2	12,0	10,0	6,2				
Winner 150	1,00	1,50	7,30		18,8	17,5	15,5	13,5	10,0	7,5	4,0		
Winner 200	1,50	2,00	9,20			19,5	17,8	15,8	12,0	10,0	7,2	4,5	
Winner 300	2,20	3,00	12,20				23,0	21,2	18,5	16,5	14,0	11,0	5,5